

Alpha ADJUST Code : GT. BS3050

CE IP65 CRI>90 ³SDCM

Description

In-ground up-light directional 18° with optional anti-glare shield. Dimmable, IP rated.

Smallest dimensions, discreet with medium or narrow beam. Great for up-lighting and step washing.

Materials

Die-cast aluminium, Stainless steel 316S (marine grade)

Colour finish

Brushed stainless steel or -RAL

Cut-out (mm) 50 mm


Weight (KG) 0.15

Light Source

Option A. 3W LED (180 lms) 700mA 4v 15°

Option B. 3W LED (200 lms) 700mA 4v 36°


CCT available 2700K / 3000K

Dimming: Phase, 0-10v, DALI (remote). Casambi  allows dimming control of each fixture



Special Notes: optional anti-glare 'half-shield'
custom finishes subject to extra charge



Alpha ADJUST

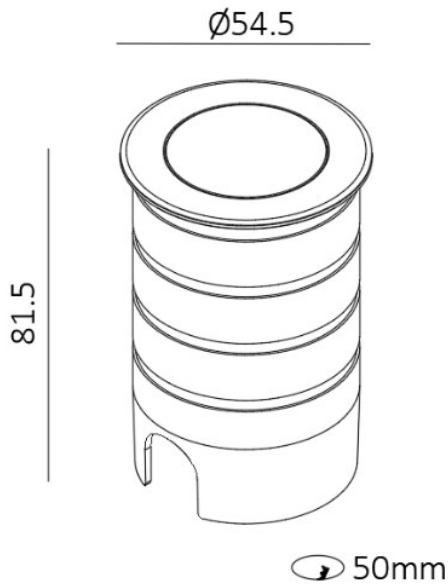

Remote driver required

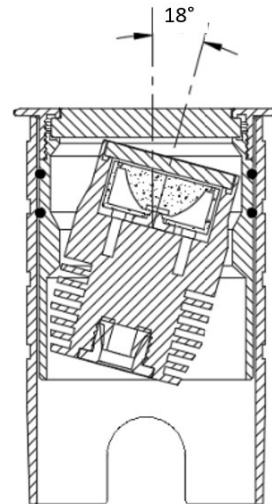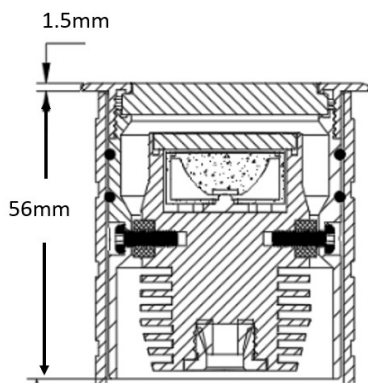


Accessories available to order

-anti-glare 'half-shield'



REDUCE CABLE SIZE IN ORDER TO MAKE
SECURE CONNECTION

WIRE-IN-SERIES

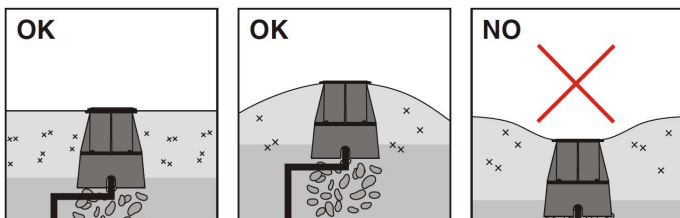

WARNINGS - all enclosures and fittings for external lights must be at least IP65 - allow adequate drainage around fittings.

Dimensions (mm) 38 x (h)39.55 - excluding optional sleeve